

Strata **Safe Rooms** (SSR)

Underground Refuge Alternative

The Strata Safe Room is a pre-constructed underground refuge room for emergencies. It is designed to provide life-sustaining shelter, supplies and breathable air to miners trapped underground, and can be built to any size and required occupancy.



KEY BENEFITS

- Inexpensive to build, maintain and equip
- Accommodates large numbers of people
- Easily expanded
- Ready for immediate use once installed and air-tight
- Self-contained skid-based components for flexible options and layout




BREATHABLE AIR OPTIONS

- Self-contained breathable air system including a carbon dioxide scrubber and regulated oxygen supply
- Compressed mine air connection with high quality air filtration
- Borehole air supply


SAFE ROOM ACCESS

- Air-tight steel-door access and optional dual-door Airlock entrance:
 - Optional blast-resistant access door (15 psi)
 - Optional purge air system in airlock
- Escape hatch with optional blast resistance (15 psi)

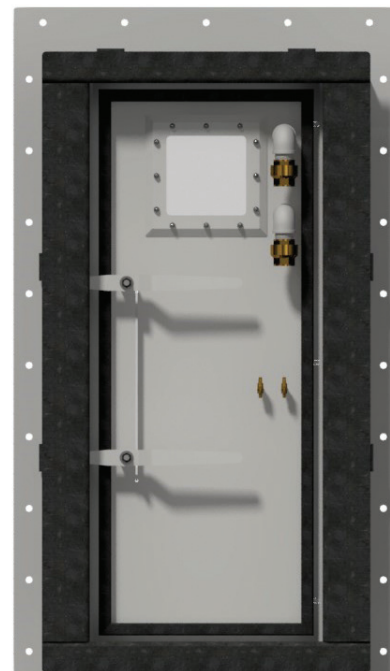

SAFE ROOM COMPONENTS

- Bench seating for required occupants
- Optional air cooling with dehumidifying system
- Auxiliary battery power to provide autonomy up to 96 hours
- Lighting and alarm/siren kit for interior and exterior

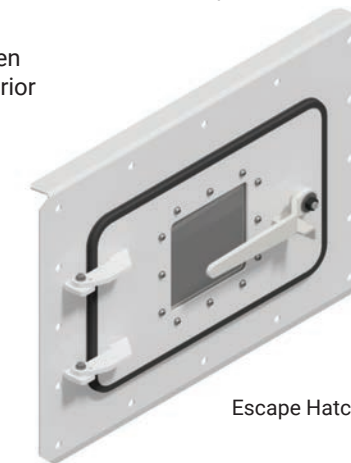

Escape Hatch

ACCESSORIES AND COMMODITIES

- Atmospheric monitoring
- First aid kits
- Communication
- LED string lights
- Food & water
- Private lavatory

Strata provides seamless customer support from design through implementation of the Safe Room and construction does not interfere with mining operations.

MODULAR COMPONENTS

Carbon Dioxide (CO2) Scrubbing

- Maintains CO2 levels below 1% (10,000 ppm)
- Battery-powered fans circulate air through scrubber
- Soda lime chemicals remove CO2
- Power-less soda lime curtains (alternative)

Oxygen Supply

- Individual skid stores up to twenty (20), 2,900 psi (200 bar) cylinders
- Multiple skids can be used for additional cylinders
- Regulators, flow valves included

Air Cooling with Dehumidifying

- Regulates internal temperatures and humidity
- Operates on mine power or battery back-up
- Continuous charging for emergency readiness
- 110 – 600 VAC input
- Minimum of 48 hours continuous cooling

Additional Options

- Auxiliary battery power can be designed to meet your specific requirements
- Storage cabinets for accessories and commodities



AMERICAS

8800 Roswell Road, Suite 145
Sandy Springs, GA 30350 USA
TF: 800-691-6601
T: 770-321-2500
T: 724-745-5030
info@strataworldwide.com

CANADA

Ontario
North Bay, Ontario Canada
Tel: (705) 978 2304